


## Product specification sheet

### SP16 | Solution for highest thermal requirements

**Material:** Styrol-Acrylnitril-Copolymer (SAN) with glass fiber, multilayer barrier foil

**Colors:** Similar to RAL 7035, similar to RAL 7040, similar to RAL 8003, similar to RAL 8016, similar to RAL 9005, similar to RAL 9016

**Certifications:** EN 1279 2, 3 & 6, EN ISO 4892-2, DTA, RAL Gütezeichen Mehrscheiben Isolierglas. It is a certified Passive House Component Class pHA for Arctic Climate.

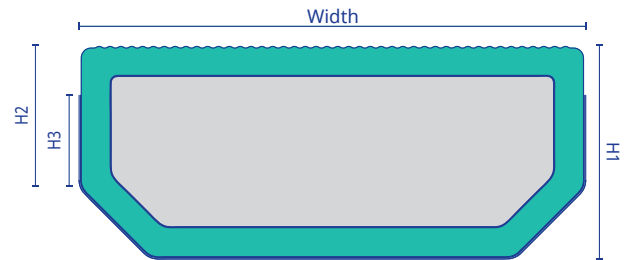

Spacer bar	Widths ± 0.05 [mm]	H1 ± 0.05 [mm]	H2 [mm]	H3 Butyl area [mm]
10 mm	9.45	6.45	≈ 4.10	2.60
12 mm	11.45	6.45	≈ 4.10	2.60
14 mm	13.45	6.45	≈ 4.10	2.60
15 mm	14.45	6.45	≈ 4.10	2.60
16 mm	15.45	6.45	≈ 4.10	2.60
18 mm	17.45	6.45	≈ 4.10	2.60
20 mm	19.45	6.45	≈ 4.10	2.60
22 mm	21.45	6.45	≈ 4.10	2.60
24 mm	23.45	6.45	≈ 4.10	2.60

	Specification	Test method		Specification	Test method
	6000 mm +20/-0 mm	Measuring tape		0.31 %	Test at ift Rosenheim according to EN 1279-4:2018 Annex H
	≤ 13 kg	Dynamometer		No significant color change after 3000 h	EN ISO 4892-2 CSTB certified (French DTA)
	Rp 0.2 ≥ 55 N mm <sup>2</sup> reference SP16 width 16 mm	3 point bending test		$\lambda_{eq'} 2B =$ 0.14 W/(m · K)	The equivalent thermal conductivity has been determined in accordance with the ift guide- line WA-17engl/1 "Thermally improved spacers - Determina- tion of the equivalent thermal conductivity by measurement"
	Inlet pressure 3 bar ≥ 1.5 bar – 2.5 bar	Manometer			

In case of specific questions we gladly offer you our individual support.

Thermal edge bond solutions  
for insulating glass